



# AVT<sup>®</sup> EZ VALVE<sup>®</sup>

Install Kit

---



**Advanced Valve  
Technologies**

[www.AVTFittings.com](http://www.AVTFittings.com)

[Sales@AVTFittings.com](mailto:Sales@AVTFittings.com)

# AVT EZ VALVE™ KIT

The AVT EZ Valve Kit enables safe and efficient installation of the award-winning AVT EZ Valve. The innovative EM (end milling) machines are the only ones of their type on the market that mill a 120° slot across the pipe rather than cutting a coupon or removing a section of the pipe. This design allows the valve to be installed at full line pressure enabling faster restoration than alternative solutions, preserving pipe integrity, and allowing installation under full pressure with no need to shut off the water supply.

The AVT EZ Valve Kit provides everything necessary for installation including (non-exhaustive):

## 1.5" TO 2" (40MM TO 50MM) KIT

- 1 End Milling Machine (1.5" and 2" / 40mm and 50mm – Nano)
- 1 Hydraulic power pack (Petrol)
- 2 End Milling Cutters
- 2 Sets of End Rings (1.5" to 2" / 40mm to 50mm)
- 1 Export Hose & Ball Valve
- 1 Debris Collection Bag
- 1 Tool Kit (selection of hand tools)

## 3" (80MM) KIT

- 1 End Milling machine (3" / 80mm –Micro)
- 1 Hydraulic power pack (Petrol)
- 1 End Milling Cutter
- 1 Set of Replaceable teeth
- 1 Set of End Rings (3" / 80mm)
- 1 Export Hose & Ball Valve
- 1 Debris Collection Bag
- 1 Tool Kit (selection of hand tools)

## 4" TO 14" (100MM TO 350MM) KIT

- 1 End Milling Machine (4" to 14" / 100mm to 350mm Capability)
- 1 Hydraulic power pack (Petrol)
- 1 Temporary Flush Valve Assembly (4" to 8" / 100mm to 200mm)
- 1 Temporary Flush Valve Assembly (10" to 12" / 250mm to 350mm)
- 1 End Milling Cutter
- 1 Set of Replaceable teeth
- 2 End Rings of relevant size\*
- 1 Drive Chain & Tensioner
- 1 Hand Cranked Gearbox
- 1 Export Hose & Ball Valve
- 1 Debris Collection Bag
- 1 Tool Kit (selection of hand tools)

\*6 End Ring Sets Available (4" to 14" / 100mm to 350mm) | 14" End Rings are a separate additional cost

## 16" TO 24" (400MM TO 600MM) KIT

- 1 End Milling Machine (16" to 24" / 400mm to 600mm Capability)
- 1 Temporary Flush Valve Assembly
- 1 Hydraulic power pack (Petrol)
- 1 End Milling Cutter
- 1 Set of Replaceable teeth
- 2 End Rings of relevant size\*\*
- 1 Drive Chain & Tensioner
- 1 Hand Cranked Gearbox
- 1 Export Hose & Ball Valve
- 1 Debris Collection Bag
- 1 Tool Kit (selection of hand tools)

\*\*4 End Ring Sets Available (16", 18, 20" or 24" / 400mm to 600mm)

With the Kit in hand, there is no need to purchase another kit for subsequent installations on the same size valves, and planning for maintenance is easy. Once the new AVT EZ Valve Kit and valve arrive, repairs can get underway quickly.

### APPLICATIONS:

- Municipal water networks
- Transmission and distribution lines
- Wastewater treatment plants
- Sewer force main
- Refining and petrochemical plants
- Offshore applications
- Commercial buildings / isolation
- High-rise buildings
- Multiple occupancy buildings
- Industrial process piping
- Ground storage tank isolation

### FEATURES:

- Everything needed for installation arrives in one box
- Lightweight, compact installation equipment
- Fewer bolts used than other options available
- Tools designed for installation under pressure
- Simple installation instructions
- End Mill machine includes a 'stop' mechanism to prevent over or under rotation

### BENEFITS & VALUES:

- No waiting for installation tools
- Faster emergency repairs
- Simplifies maintenance planning/execution
- No guesswork regarding installation methodology
- One excavation required rather than two or three meaning lower cost of install
- Less time in the excavation for operators meaning safer working conditions



# INSTALL PROCESS

1

## Prepare Insertion Site

Prepare insertion site by lubricating the gasket and contact areas



2

## Lubricate Gasket Sets & Channels

Lubricate gasket sets and gasket channels in casting bodies



3

## Assemble Ductile Iron Castings

Assemble ductile iron castings with stainless steel fasteners to accept a pressure test and temporarily allow rotation for milling



4

## Attach EM Machine


Check integral isolation gate is fully open, fit rotation assembly, attach EM machine and pressure test



5

## Mill A Slot Over a 120° Path

Maintaining system line pressure, mill a slot over a 120° path (Note: The slot normally is cut to provide for vertical valve alignment, but the installer can select any position.)

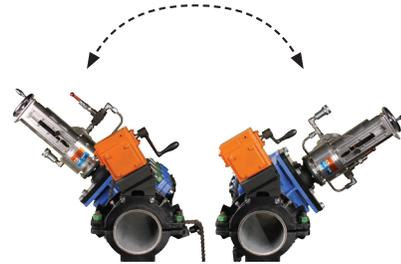

6

## Retract The Milling Head

Retract the milling head, close the integral isolation gate. Replace the EM Machine with the resilient wedge bonnet, remove the rotation assembly and tighten casting fasteners to specified torque values



7


## Open and Operate

Open the integral isolation gate and operate the AVT EZ Valve. For line stop applications, replace the valve bonnet with a blind flange using the integral isolation gate



# EZ VALVE SPECIFICATION


For illustration purposes only, some differences may occur dependent upon size.

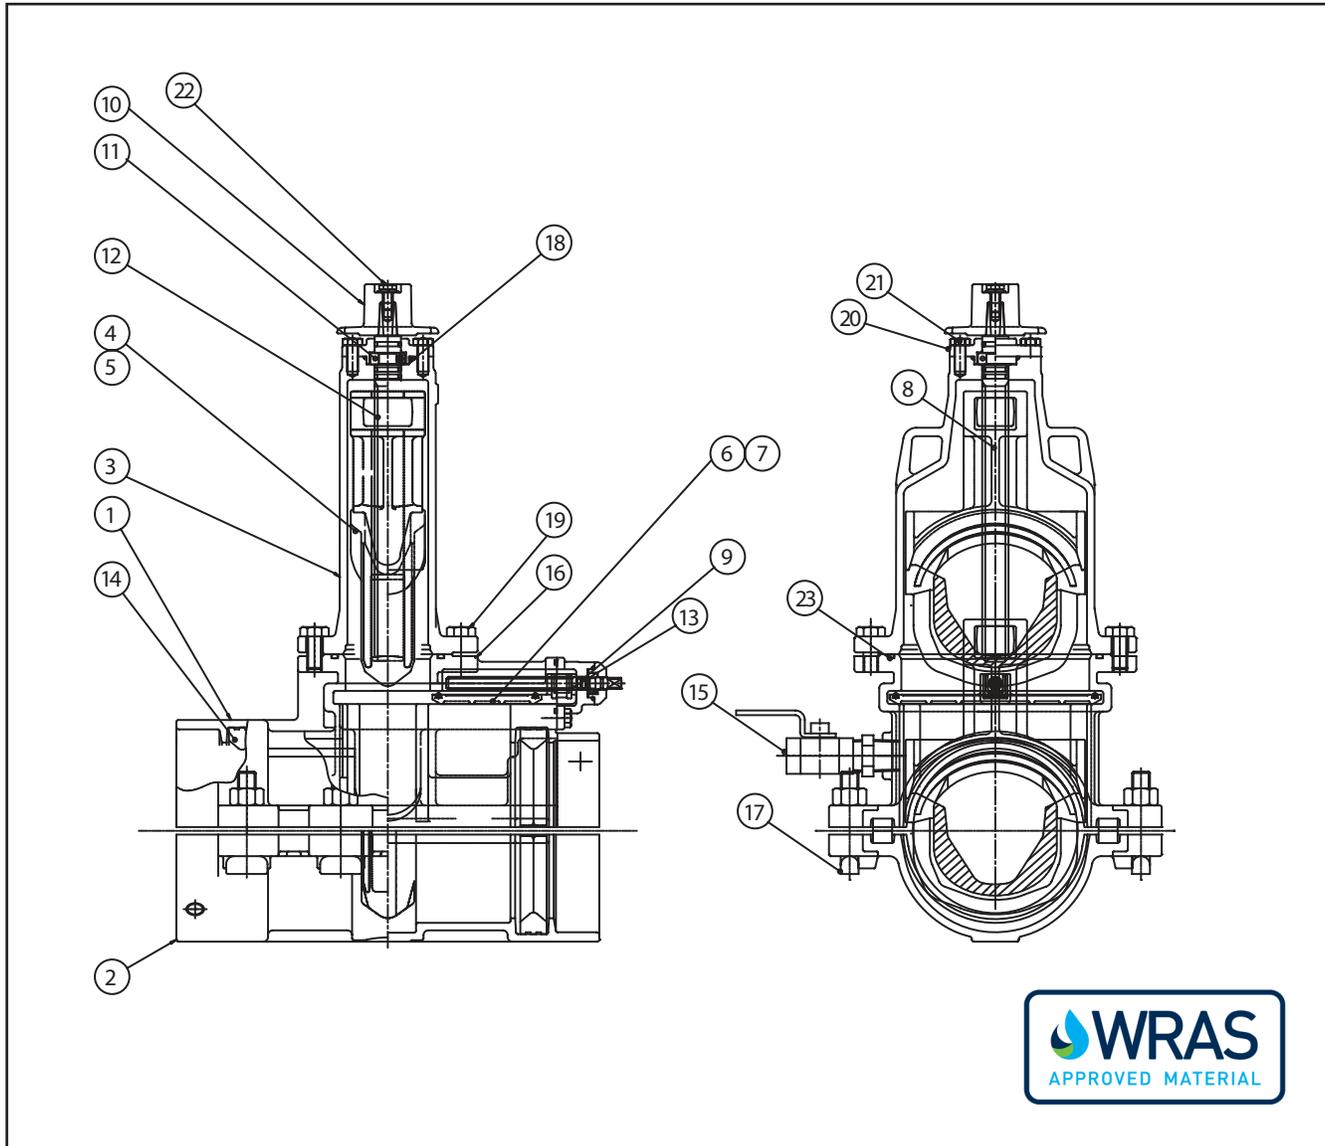

Item No	Description	Material
1	Upper Half of Body	DUCTILE IRON
2	Bottom Half of Body	DUCTILE IRON
3	Bonnet Body	DUCTILE IRON
4	Gate	DUCTILE IRON
5	Gate Rubber	EPDM
6	Isolation Gate	DUCTILE IRON
7	Isolation Gate Rubber	EPDM
8	Stem (Feed Screw)	STAINLESS STEEL
9	Isolation Gate Stem	STAINLESS STEEL
10	Wrench Nut	DUCTILE IRON
11	Set Collar	BRONZE
12	Stem Nut	BRONZE
13	Isolation Gate Stem Nut	BRONZE
14	Gasket	EPDM
15	Chip Flushing Port	N/A
16	EM Cutting Port	N/A
17	Body Fasteners	DUCTILE IRON
18	O-Rings	BUNA-N
19	Bonnet Bolts	STAINLESS STEEL
20	Packing Gland	DUCTILE IRON
21	Packing Gland Bolts	STAINLESS STEEL
22	Bolt for Wrench Nut	STAINLESS STEEL
23	Bonnet O-Ring	EPDM

# CUT AWAY VALVE WITH KEY

For illustration purposes only, some differences may occur dependent upon size.

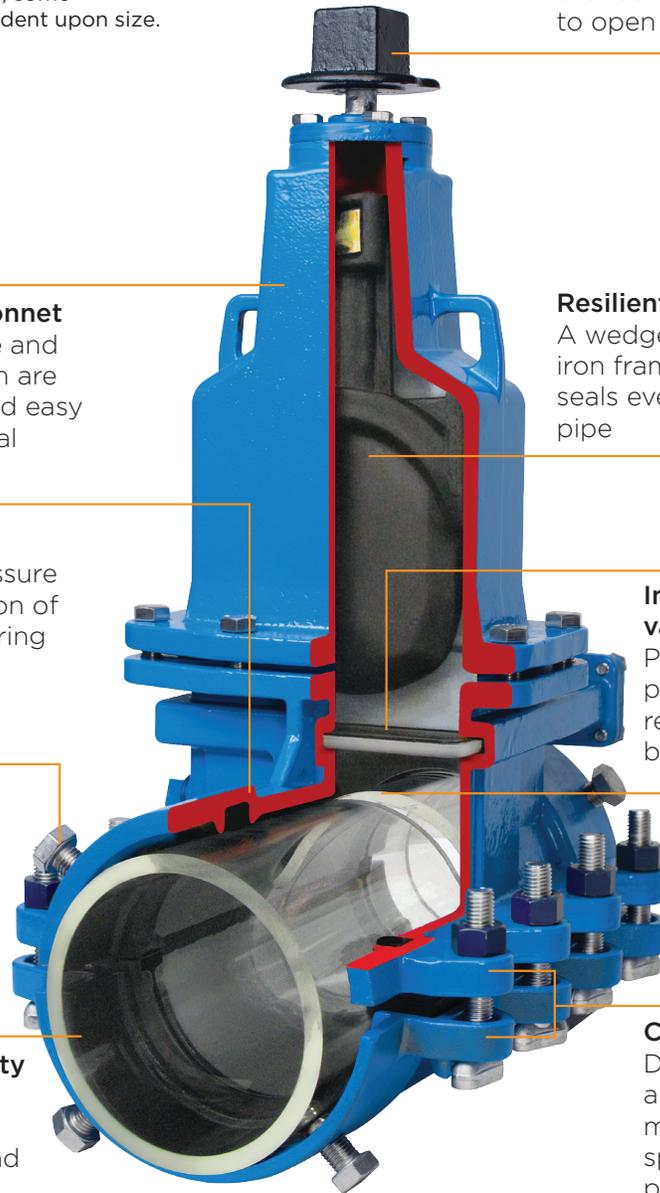

## Actuator

Standard number of turns to open and close valve

## Removable Valve Bonnet

Resilient wedge gate and actuation mechanism are contained for fast and easy installation or removal

## Resilient Wedge

A wedge gate over a ductile iron frame that effectively seals even tuberculated host pipe

## Gasket & Channel

Maintain system pressure while allowing rotation of casting assembly during slot-milling

## Integrated isolation valve

Provides “under pressure” installation or removal of valve bonnets or blind flanges

## Fasteners

Stainless steel components secure casting assembly and provide final positioning on pipe

## Insertion Slot

One narrow slot over a 120° path maintains pipe integrity and creates resilient wedge access

## Pipeline Compatibility

The EZ Valve design works with most metallic pipes, AC and PVC materials

## Castings

Ductile iron castings are precision machined to fit project specifications and pipe material

**Warranty:** A One Year warranty covers parts and labor for Equipment and Valves (Excluding Perishable Tooling and O-Rings) barring misuse or lack of routine maintenance.

## ILLINOIS

800 Busse Road  
Elk Grove Village, IL 60007  
P: +1 847 364 3700  
F: +1 847 364 8883

## ILLINOIS

12601 South Homan Ave  
Blue Island, IL 60406  
P: +1 708 489 4901

[www.AVTFittings.com](http://www.AVTFittings.com) [Sales@AVTFittings.com](mailto:Sales@AVTFittings.com)

Advanced Valve Technologies (AVT) is part of ClockSpring|NRI, the high-performance critical infrastructure solutions company. AVT's advanced solutions are based on simple designs that minimize risk to the environment and reduce costly downtime. Our primary focus is on disruptions in water service that cost providers money and leave end users without service.

EZ Valve® is a registered trademark of Advanced Valve Technologies LLC.  
© 2022 Advanced Valves Technologies, LLC. All rights reserved.



**Advanced Valve  
Technologies**

V: 09.29.2022